


INSTALLATION INSTRUCTIONS

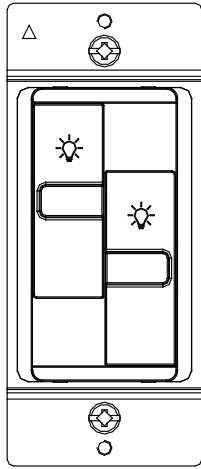

Model: LDDS-1P
Double LED Dimmer
 * Two Single-Pole Only

SPECIFICATIONS


Operating Control	, Wall Mounted Switch Control
Construction of control Independently Mounted for Flush Mounting
Voltage120VAC, 60Hz
Load 1300 W INC/HAL
200 W LED/CFL
Load 2300 W INC/HAL
200 W LED/CFL
Type of ActionType 1.B Action (Micro-Disconnection for Air Gap)
Pollution Degree2
Rated Impulse Voltage2500V
Software ClassClass A
Operating Temperature32° F - 104° F (0° - 40° C)
Wire Gauge#14 ~ #12 AWG

WARRANTY

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Lider-Electric, Inc. Warranties from other Lider-Electric products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Lider-Electric shall not be liable to the purchaser or end user customer of Lider-Electric products for direct, indirect, incidental, or consequential damages even if Lider-Electric has been advised of the possibility of such damages. Lider-Electric's total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory

WIRING DIRECTIONS


1. Remove the wall plate.
2. Remove existing switch from wall box and prior to disconnecting wires, identify the wires and label as needed.
3. Remove wires from existing switch.
4. Follow the diagram below to connect the LDDS-1P

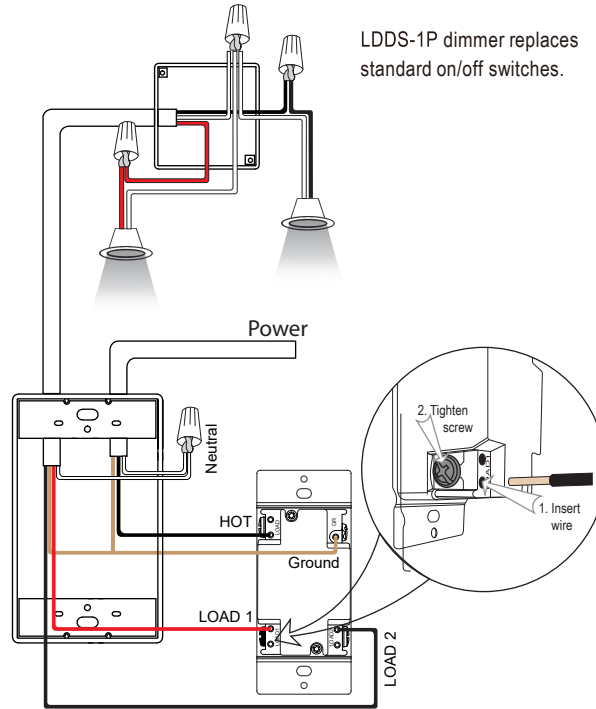

OPERATING INSTRUCTIONS

The dimming slider has an off position when you move the slider all the way down. There will be a noticeable click when you slide to turn on or off.


Be sure to use dimmable light bulbs!

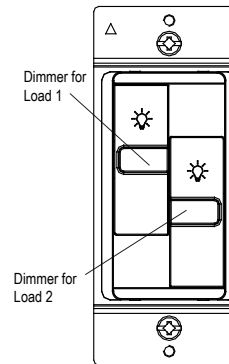

IMPORTANT NOTICE

This device is designed for two light loads

You must have two load wires in the switch box and a HOT wire in order to use this dimmer. One load wire goes to the LOAD 1 and the other load wire goes to the LOAD 2

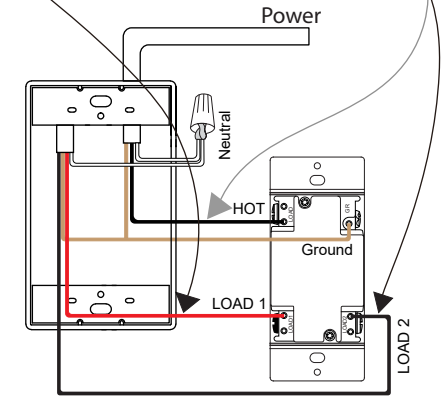

WARNING

Turn the power off at the circuit breaker before installing this device.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only. No Aluminum.

INPUT: Use wires with minimum rating of 167° F (75° C)

CAUTION - To reduce the risk of overheating and possible damage to other equipment, Do Not Install to control a receptacle, motor-operated appliance, fluorescent lighting fixture or a transformer supplied appliance.

- Risk of Electric Shock - More than one disconnect switch may be required to de-energize the device before servicing

ATTENTION - Pour réduire le risque de surchauffe et les possibles dommages à d'autres équipements, ne pas installer pour contrôler un réceptacle, un appareil à moteur ou un luminaire fluorescent ou un appareil fourni par transformateur.

- Risque de choc électrique - plus d'un interrupteur de déconnexion peut être nécessaire pour débrancher l'appareil avant l'entretien

