


INSTALLATION INSTRUCTIONS

WARNING

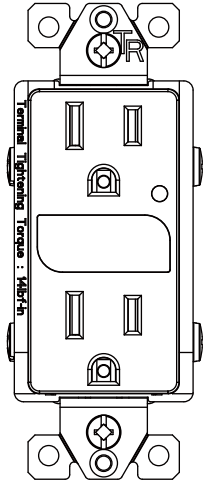

Model: LGL-15TR
Decorator Tamper-Resistant Receptacle
With Guide Light

FEATURES

- Duplex 15A Decorator Receptacles
- 3000K LED Guide Light with Daylight sensor
- Clamp-Type wire terminals are designed for easy installation from the back
- UL Listed

SPECIFICATIONS

Rating.....	15 Amp, 125VAC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
Dimension	2 3/4" x 1 1/2" x 1 5/8"

NOTE: Push-in terminals for use on 15 ampere branch circuits only and with No. 14 AWG solid copper conductors only. Do not use push-in terminals on a 20 ampere branch circuit.

WARRANTY

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Lider, Inc. Warranties from other Lider products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Lider shall not be liable to the purchaser or end user customer of Lider products for direct, indirect, incidental, or consequential damages even if Lider has been advised of the possibility of such damages. Lider's total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory


Turn the power off at the circuit breaker before installing this device.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.

WIRING DIRECTIONS


Turn off the power at the circuit breaker. Identify the HOT, NEUTRAL, and GROUND wires in the wall box. Insert wires into the terminal holes on the back side of the receptacle, then tighten the terminal screws to clamp wires in place.

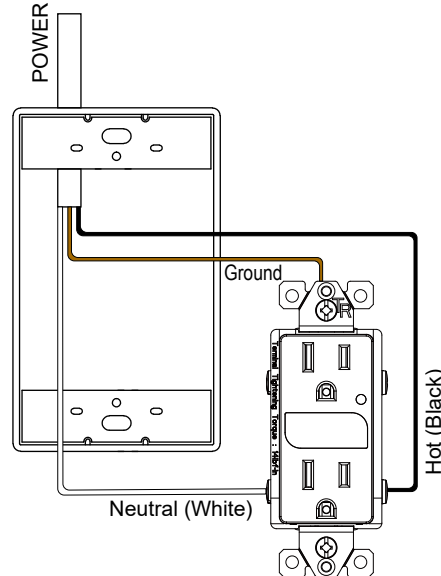


IMPORTANT SAFETY INSTRUCTIONS (SAVE THESE INSTRUCTION)

For Receptacle Model LGL-15TR:
"WARNING - Use only replacement part (Model LGL-15TR-SFA) with Receptacle (LIDER, Model LGL-15TR)"

Grounding clip. If you have a metal wall box that is properly grounded, this grounding clip will ground the receptacle without the need to install the ground wire to the green terminal screw on the receptacle

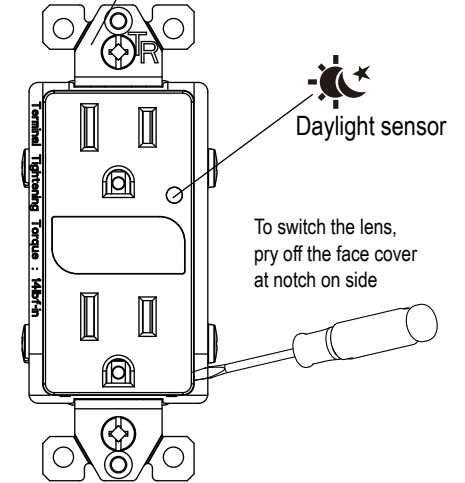

To switch the lens, pry off the face cover at notch on side

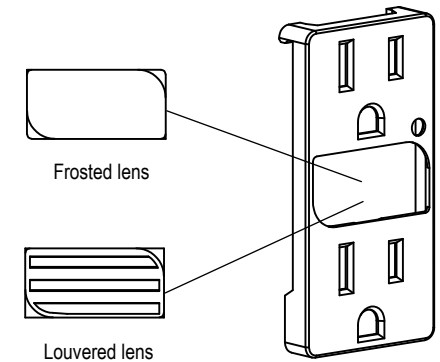

"WARNING - Risk of Fire or Electric Shock. Do not use this replacement part with any receptacle, other than the one specified on the replacement mark packaging and in these instructions."