


# INSTALLATION INSTRUCTIONS



## Model: LGL-3W 3-Way Decorator Switch With Guide Light

### FEATURES

- Single 15A Decorator Switch
- Guide Light with Daylight sensor
- Replaces Single-Pole or 3-Way switch
- Clamp-Type wire terminals are designed for easy installation from the back
- UL Listed
- Compatible with LED, CFL, Incandescent, and Halogen lights

### SPECIFICATIONS

Switch Rating.....	15 Amp, 120VAC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
Switch Dimension .....	2 3/4" x 1 1/2" x 1 5/6"

### WARNING

#### Turn the power off at the circuit breaker before installing this device.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.

Use copper wire only.




### WARRANTY

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Lider-Electric, Inc. Warranties from other Lider-Electric products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Lider-Electric shall not be liable to the purchaser or end user customer of Lider-Electric products for direct, indirect, incidental, or consequential damages even if Lider-Electric has been advised of the possibility of such damages. Lider-Electric's total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.

### WIRING DIRECTIONS

#### NEUTRAL WIRE REQUIRED FOR LED GUIDE LIGHT

Turn off the power at the circuit breaker. Identify the HOT, NEUTRAL, TRAVELER and GROUND wires in the wall box. Insert wires into the terminal holes on the back side of the receptacle, then tighten the terminal screws to clamp wires in place.

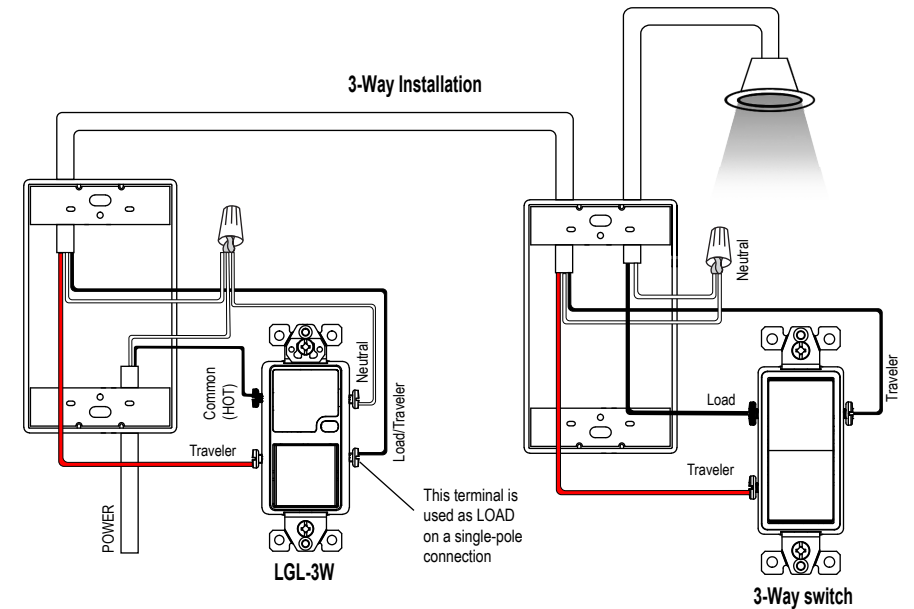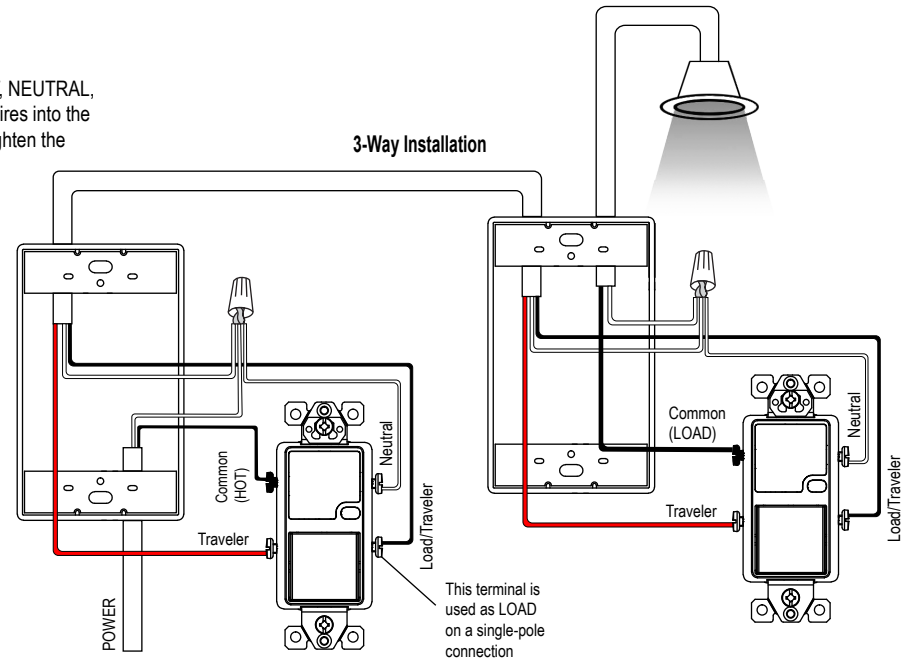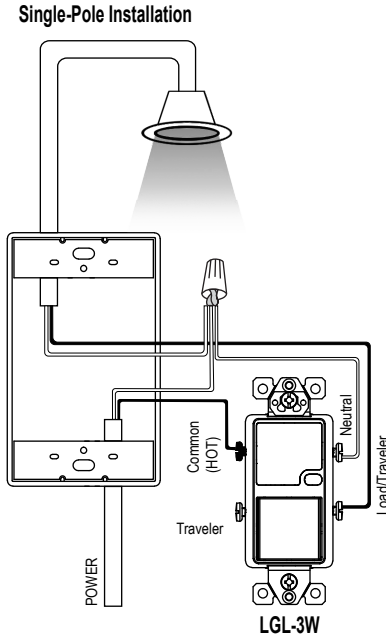

LIDER®

©2022 Lider-Electric, Inc. • CA, USA • www.Lider-Electric.com • 0209220176-01