


INSTALLATION INSTRUCTIONS

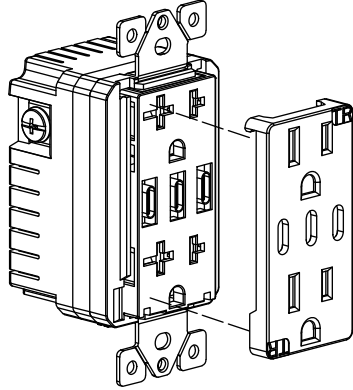

Model: LU-6C
USB Type-C 6A in-wall charger with Duplex Tamper-Resistant Receptacles

SPECIFICATIONS

Receptacle rating.....	15 Amp, 125VAC, 60Hz
Type C USB Rating:.....	5V/3A (each port)
Rated USB Current.....	6A total
USB compatibility.....	USB 1.0, 1.1, 2.0, 3.0, 3.1, includes Apple® products
Operating temperature.....	-4 to 140°F (-20 to 60°C)
Receptacle dimension	1 11/16"W × 2 11/16"H × 1 13/16"D

WARNING

Turn the power off at the circuit breaker before installing this device.

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.


Use copper wires only.

WARRANTY

This device is warranted to be free of material and workmanship defects for 1 year from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Lider-Electric, Inc. Warranties from other Lider-Electric products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Lider-Electric shall not be liable to the purchaser or end user customer of Lider-Electric products for direct, indirect, incidental, or consequential damages even if Lider-Electric has been advised of the possibility of such damages. Lider-Electric's total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory

WIRING DIRECTIONS

1. Turn off power at circuit breaker.
2. Identify the HOT, NEUTRAL, and GROUND wires in the wall box.
3. Insert wires into the terminal holes on the back side of the receptacle, then tighten the terminal screws to clamp wires in place.

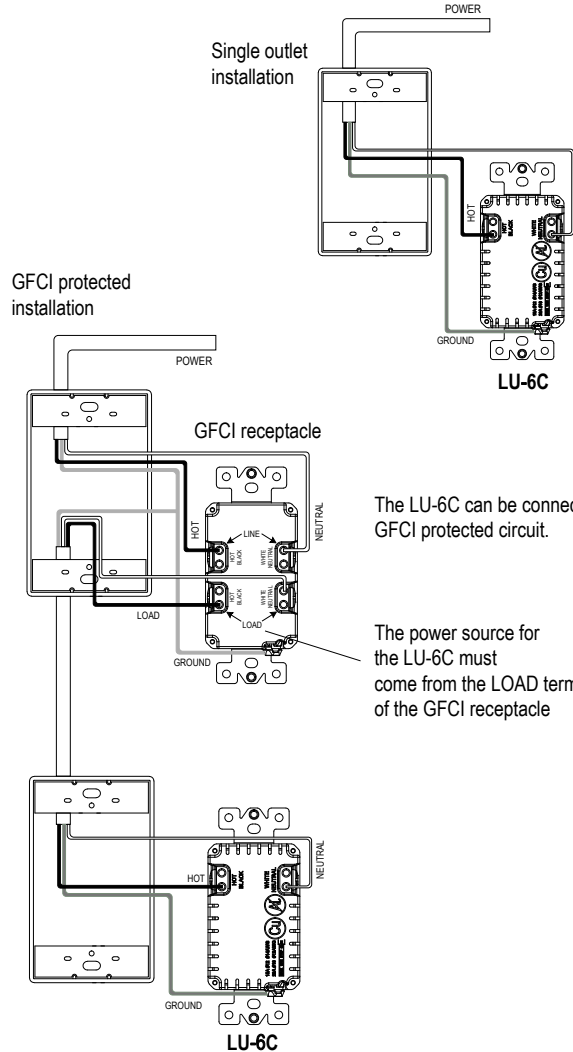


The LU-6C can be connect to a GFCI protected circuit.

The power source for the LU-6C must come from the LOAD terminals of the GFCI receptacle

COMPATIBILITY

- Built in smart chips recognize the individual device's charging protocols and requirements to optimize charging of your electronic devices for fast and efficient charging of tablets, phones, battery packs, gaming devices, e-readers and a host of other electronic devices.
- Type C USB charging ports feature a total output of 5V, 6.0 Amp, 30W. Triple Type-C USB ports (3.0A each)
- Future proof 3 reversible Type C USB ports for the increasingly popular electronic devices trend.

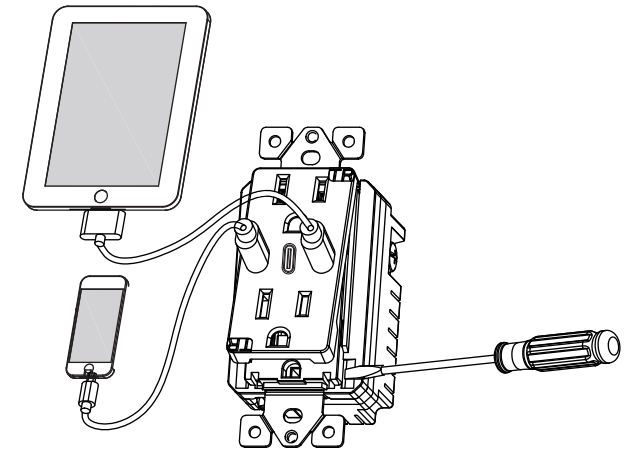

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation of the device.

